

SPECIFICATION
FOR 
BATTERY, DRY (LECLANCHÉ), 150 V, NO. 1, NATO STOCK NO 6135-99-910-1165

This Supplement supersedes SUPPLEMENT NO 58 to
DEF STAN 61 - 3 (PART 1), dated 19 March 1968

1. This Supplement is to be read in conjunction with the General Specification for primary batteries (Leclanché, mercury, and manganese alkaline types) contained in DEF STAN 61 - 3 (PART 1).

2. NOMINAL VOLTAGE

a. Cell.

1.5

b. Battery.

150

3. DIMENSIONS

Dimensions shall be in accordance with the requirements of the attached drawing.

4. MASS

Mass shall not exceed 1 pound 6 ounces (623.7 grams).

5. MARKINGS

Marking shall be in accordance with the requirements of the General Specification in DEF STAN 61 - 3 (PART 1), clause 11. and the attached drawing.

6. CONSTRUCTION

a. Assembly.

- (1) 100 layer-type cells connected in series and enclosed in an insulating container.
- (2) Inter-stack connections shall be soldered using insulated stranded wire. Socket-stack connections shall be soldered using insulated stranded wire.
- (3) The sockets shall be sealed in such a manner that the seal may be removed and replaced effectively to permit testing of the battery during storage.

6. a. (4) After sealing, the battery shall be dipped in micro-crystalline wax at a temperature of not less than 100°C for not less than five seconds, in such a manner that the battery is covered completely with a smooth and continuous protective wax film.
- (5) A fibre glass extraction tape shall be fitted around each battery, formed and looped in accordance with the requirements of the attached drawing.
- b. Cell details.
- Size: F30 (BS 397)
- c. Terminations.
- Sockets in accordance with the requirements of the attached drawing.

7. STORAGE AND PERFORMANCE TESTS

a. Allocation of sample batteries.

(1) For Qualification Approval testing.

Shall be in accordance with the requirements of the General Specification contained in DEF STAN 61 - 3 (PART 1), clause 14.b

(2) For Quality Assurance testing

Number of sample batteries supplied shall be in accordance with the requirements of the General Specification contained in DEF STAN 61 - 3 (PART 1), clause 14.b. and shall be divided between the tests shown in the table below as follows:

10% Jungle with the balance divided equally between the other four types of storage.

b. Accuracy of test apparatus.

Shall be in accordance with the requirements of the General Specification contained in DEF STAN 61 - 3 (PART 1), clause 16. except that the voltmeter used shall have a resistance of 10 000 ohms per volt of scale with a full scale value of not more than 300 volts. The limit of error of measurement shall be 1% of scale range.

7. c. Storage conditions and performance requirements.


TYPE OF STORAGE	GENERAL SPECIFICATION CLAUSE	STORAGE PERIOD (WEEKS)	MINIMUM DISCHARGE LIFE AFTER STORAGE (HOURS)
Temperate (Short term)	17.a.	4	720
Temperate (Long term)	17.a.	52	600
∕ Jungle	17.c.	8	660
∅ Desert	17.b.	26	480
Temperate (spare)	18.d.	-	-

Notes:

1. ∕ indicates insulation resistance after Jungle storage (General Specification DEF STAN 61 - 3 (PART 1), clause 19.) to be not less than 2 megohms.
2. ∅ indicates batteries stored singly.

d. Discharge test conditions.

- (1) Resistance load.
600 000 ohms (accuracy ± 1%).
- (2) Discharge cycle.
Continuous discharge.
- (3) On-load voltage end-point.
120 volts.

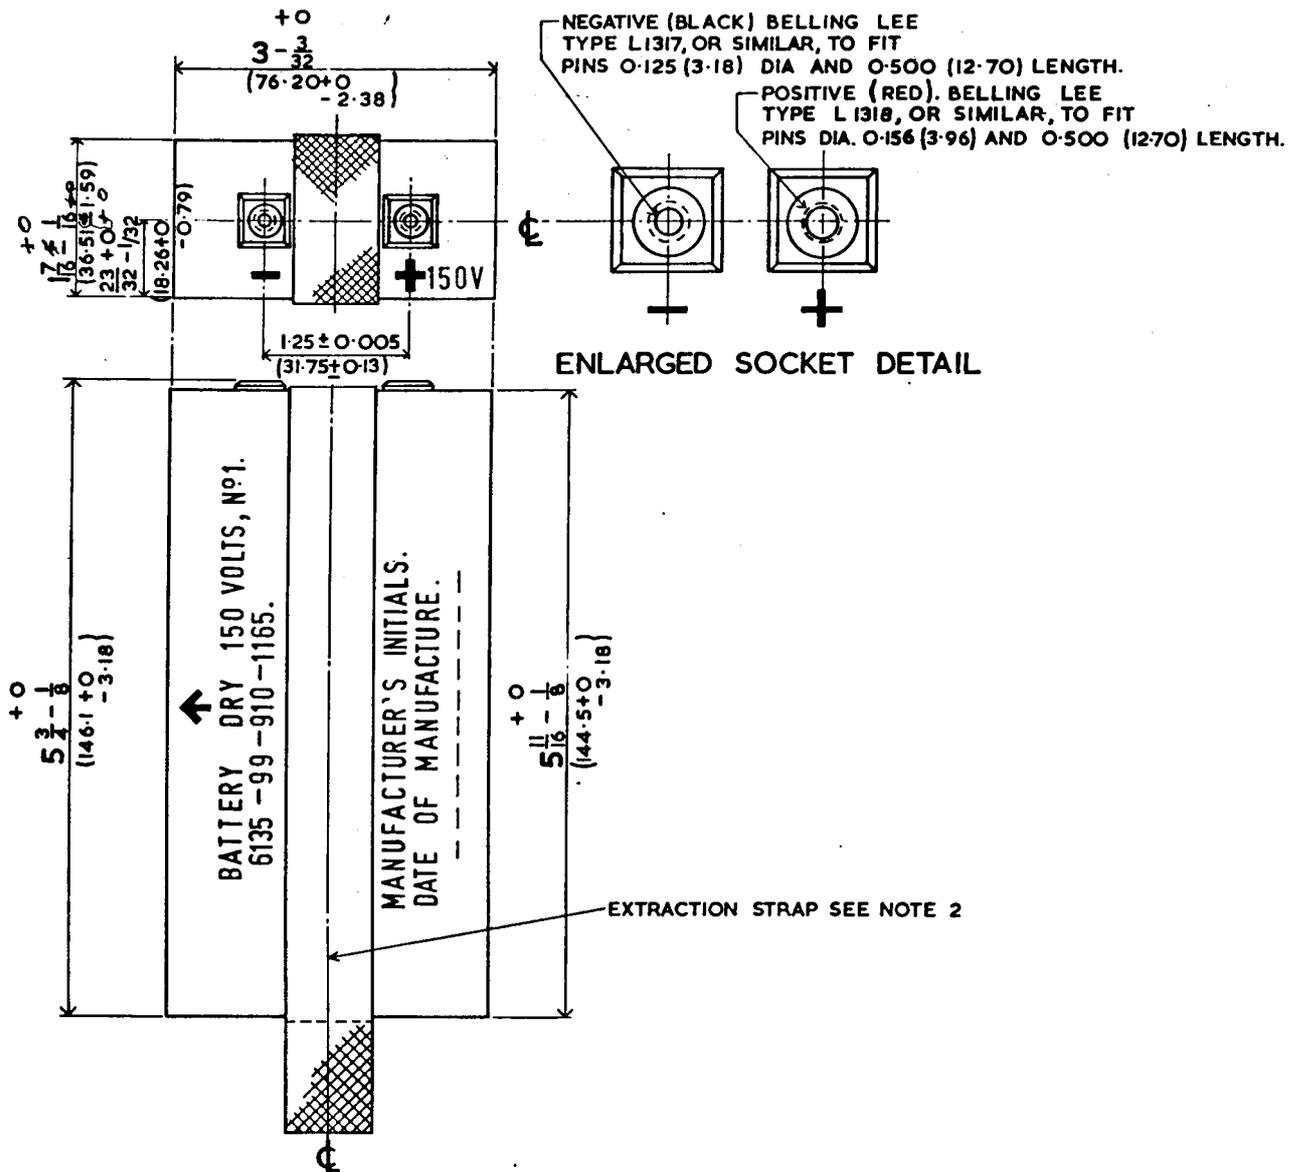

NOTES

1. ALL DIMENSIONS ARE IN INCHES WITH mm EQUIVALENTS AND SHALL INCLUDE THICKNESS OF MICRO-CRYSTALLINE WAX COATING.
2. EXTRACTION STRAP TO BE WOVEN GLASS TAPE 3/4" (19.05) WIDE X 0.005 (0.13) THICK TIED WITH A REEF KNOT OVER THE BASE OF THE BATTERY AND THE ENDS OF THE LENGTH OF TAPE MADE INTO A FINGER LOOP ONE INCH (25.40 mm) MINIMUM IN DIAMETER BY SUITABLE KNOTTING.

THIRD ANGLE PROJECTION



Procurement Executive, Ministry of Defence

Directorate of Standardization

Room 1138, Kentigern House, 65 Brown Street, GLASGOW, G2 8EX

Telephone: 0141-224 2595 (Direct Dialling)
0141-248 7890 (Switchboard)

Fax: 0141-224 2503

Internet e-mail address: t.leaver@dstan.mod.uk

Your Reference :

Our Reference : D/DStan/11/2

Date : 9 November 1998

Removal of Product Qualification Approval

IMPORTANT ANNOUNCEMENT

1. This Standard contains a Product Qualification Approval (PQA) scheme. ⁱMOD policy requires that all PQA schemes are removed from Defence Standards called up in contracts placed after 1st January 1998.
2. Users of this Standard are to contact the Project Manager (PM), Equipment Support Manager (ESM) or Technical Service Authority (TSA) named in the contract or order, to identify whether there is a continuing need for an approvals scheme.
3. ⁱⁱProduct Conformity Certification (PCC) is a risk based process that replaces PQA. Once a risk has been identified PCC can be included as a contract clause. In exceptional circumstances agreement can be sought from AD/Stan for PCC to be included in a Defence Standard.
4. At the next revision of this Standard the PQA scheme will be removed.

T R Leaver
Head of Standards Programme Management
Tel: 0141 224 2595 FAX: 0141 224 2503

ⁱ Defence Council Instruction (General) 197/97; Quality Temporary Memorandum 5/98; Chief of Defence Procurement Instruction CDPI/TECH/250 (draft)

ⁱⁱ PCC is certification that a product meets its specification. When PC is required by the contract, the contractor is responsible for obtaining the necessary PCC. Certification shall be provided from a NAMAS accredited laboratory when appropriate. PCC shall apply where a Risk Assessment has been identified by the PM; ESM or TSA.